




Photoluminescent Exit Sign System

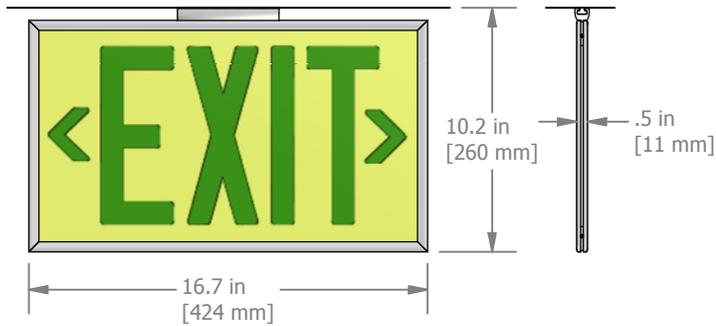

CEILING MOUNTED

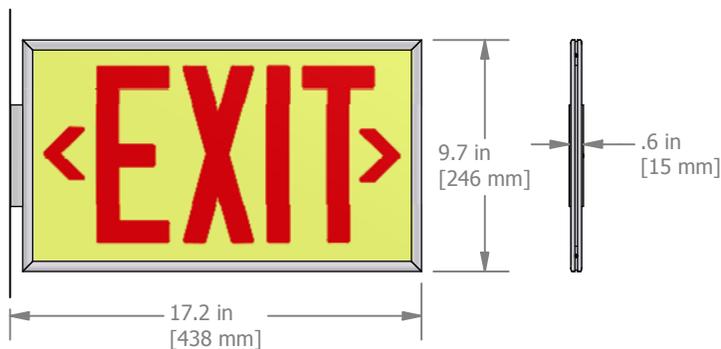

EDGE MOUNTED

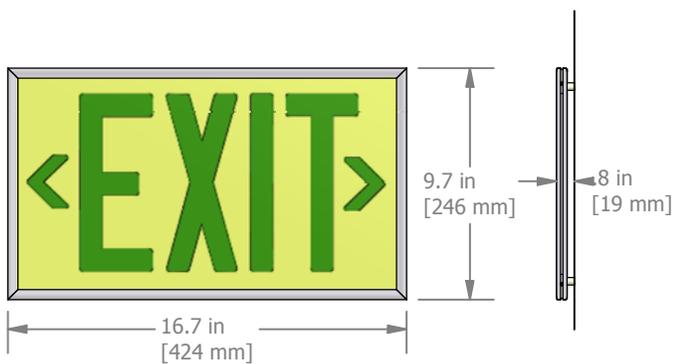

SURFACE MOUNTED

- * LEEDS point qualified for energy conservation and sustainability
- * ETL Listed for Emergency Lighting and Power Equipment according to UL STD 924 and the Canadian Standard for Photoluminescent and Self-Luminous Exit Signs ULC/ORD-C924-02
- * Visible for 75 feet
- * No electricity or batteries required
- * Requires exposure to at least 54 LUX (5-ft candles) of fluorescent, metal halide or mercury vapor light illumination for a minimum of 60 minutes to become fully operational.
- * Directional arrow labels provided with each sign for on-site application
- * Installs indoors only
- * Lifetime warranty
- * Product uses recycled aluminum and is recyclable
- * Safe to use since it is not toxic and not radioactive



RETRO FIT INSTALLATION



SLOPED CEILING MOUNTED

Retrofit Canopy Adaptor

Ecoglo's accessory cover plate gives you all the benefits of low cost installation and maintenance without the frustrations that other systems have. No special tools are required.

Simply attach universal mounting bracket to an existing octagon box, fasten the Ecoglo canopy to the mounting bracket as shown in the diagram. Slide the sign into the canopy instead of screwing it directly into a ceiling or wall.

When replacing or removing an electrically-powered exit the power must be terminated at the source not in the wall cavity before installing the Ecoglo Exit Sign. Check with the local electrical code requirements first before installation.

Sloped Ceiling Adaptor

The hinged mounting adaptor accommodates slopes from 0 to approximately 49 degrees and is installed similar to the standard ceiling configuration.

Part Number	Dimensions	Description
EX405229-75G	16" x 9" (405mm x 229mm)	Single Photoluminescent Exit Sign – Green Letters
EX405229-75R	16" x 9" (405mm x 229mm)	Single Photoluminescent Exit Sign – Red Letters
EX424246-75G	16.7" x 9.7" (424mm x 246mm)	One-Sided Exit Sign EX405229-75G with Clear Anodized Aluminum Frame and Universal Mounting Hardware – Green Letters
EX424246-75R	16.7" x 9.7" (424mm x 246mm)	One-Sided Exit Sign EX405229-75R with Clear Anodized Aluminum Frame and Universal Mounting Hardware – Red Letters

ACCESS PRODUCTS INC.

241 Main Street, Suite 100

Buffalo, New York 14203

Tel: 888-679-4022 X116

Fax: 877-679-4022

www.us.ecoglo.com